


## ENERGIZER 346

SILVER OXIDE



### Industry Standard Dimensions

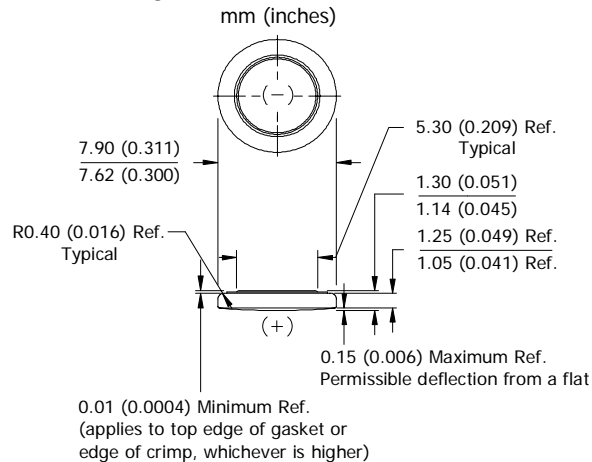


### Specifications

<b>Chemical System:</b>	Silver Oxide (Zn/Ag <sub>2</sub> O)
<b>Nominal Voltage:</b>	1.55 Volts
<b>Typical Capacity:</b>	9.5 mAh* (to 1.3 volts)
<b>Capacity Test:</b>	100K ohm continuous drain at 21°C
<b>Typical Weight:</b>	0.24 grams (0.008 oz.)
<b>Typical Volume:</b>	0.06 cubic centimeters (0.003 cubic inch)
<b>Impedance (40 Hz):</b>	30 to 40 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.

### Cross Section

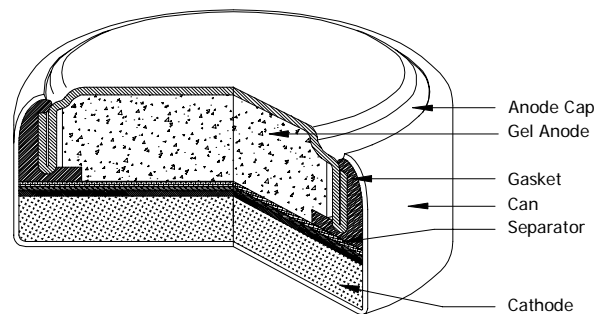


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN

### Typical Discharge Characteristics

Typical Performance at 21°C (70°F)

**Schedule:** Continuous  
**Typical Drain @1.55V:**  
0.016 milliamperes  
**Load:** 100K ohm

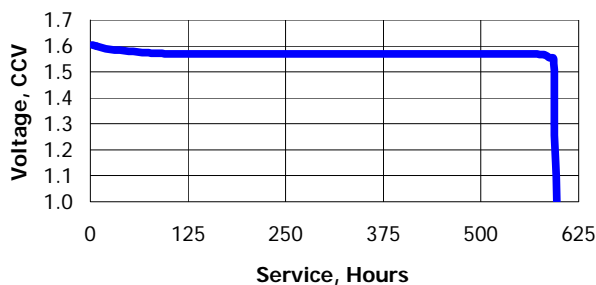


<u>Schedule</u>	<u>Typical Drains</u> at 1.55V (milliamperes)	<u>Load</u> (ohm)	<u>Cutoff</u> 1.3V (hours)
Continuous	0.016	100K	594


### Temperature Characteristics

Typical Performance at Low Discharge Rates

#### Service Effects

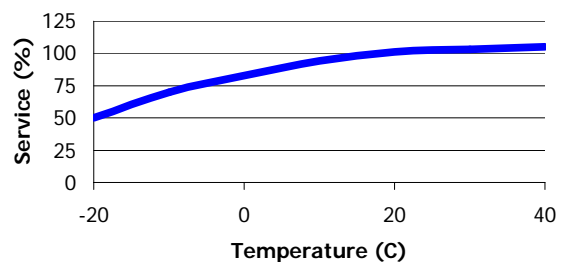

#### Storage Effects

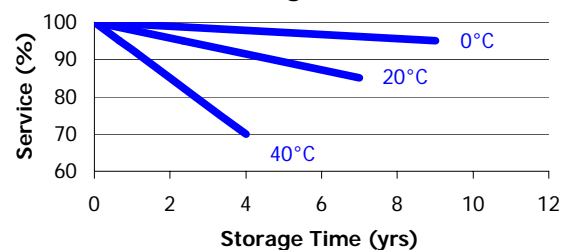

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.